



Disassembling Weather Box Oregon BAR800

This is the disassembly procedure for this weather box. The initial proposal was to repair it. At this moment, I can't do it.

Written By: Andres





TOOLS:

- [Cross Screw-Driver](#) (1)

Micro

- [knives](#) (1)

- [Phillips #0 Screwdriver](#) (1)


Flat

Step 1 — Disassembling Weather Box Oregon BAR800



- Weather Box, front side

Step 2

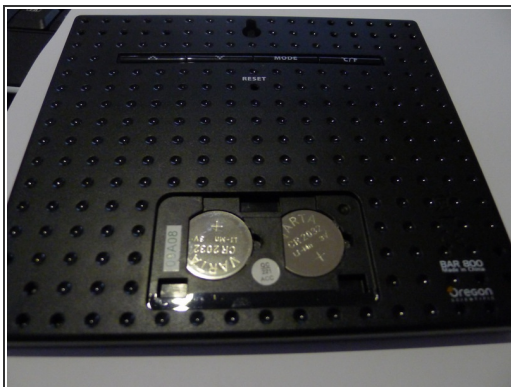


- Rear side

Step 3



- External front side is a plastic screen glued to the equipment. To disassembly it, insert a knife to cut the glue. It is soft glue, silicone, probably.
- Be carefull to not damage external plastic with knife

Step 4

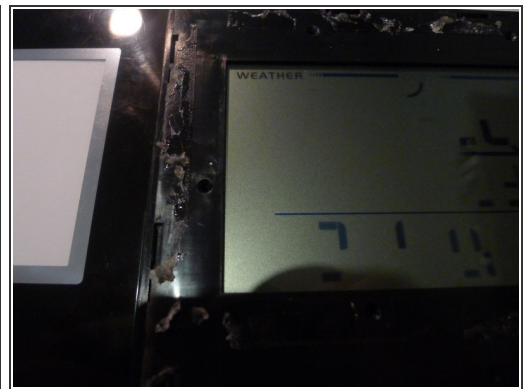



- After plastic screen removed, it can see the screws.
- With a small screw driver, take them off. There are eight screws.

Step 5



- After screws removed, it is possible to disassemble the equipment by inserting a flat screwdriver into the sides. It is strong enough to resist some efforts. Be careful anyway.

Step 6

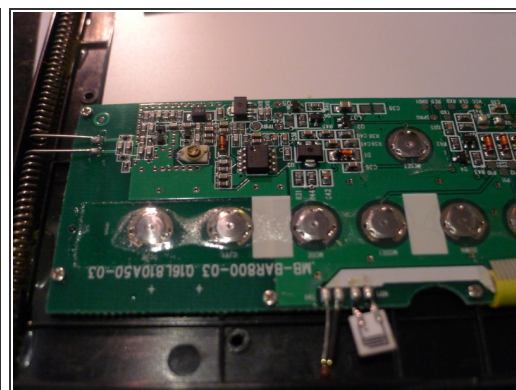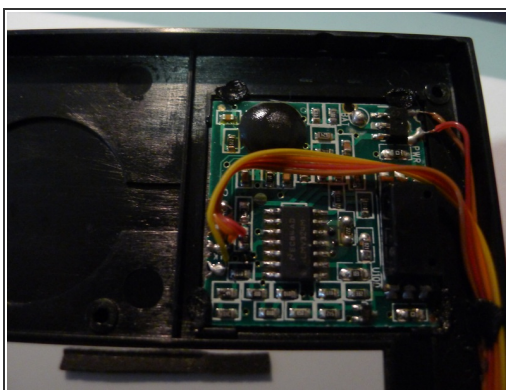

- Internal view

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-16 01:23:12 PM.